

HC3

THREOD

SYSTEMS

The HC3 single hand controller is a compact device for operating payloads, UGV's or other similar equipment. It is available in both Right and Left hand versions, depending on customer preference.





Key features:

- Perfect tool to control electro optical payloads and UGV's
- Ergonomic and weather proof design
- Available in both Right-hand and Left-hand configurations

HC3 Specifications

Shown in Right-hand configuration

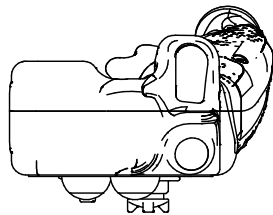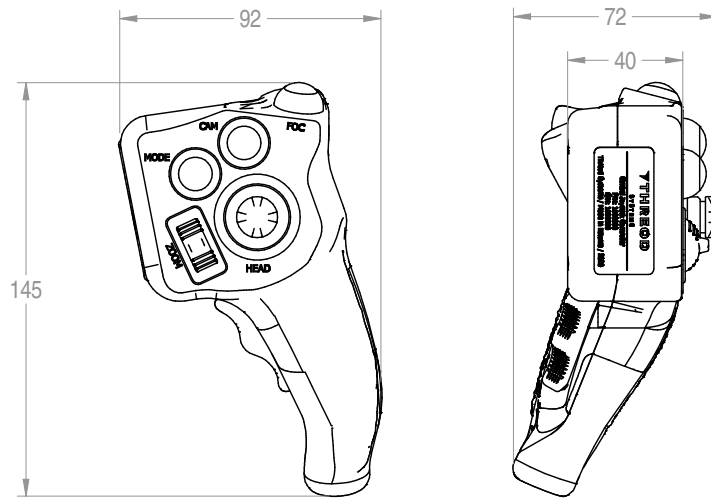

The HC3 can be used with various RVT solutions in order for the troops in the field to have gimbal control authority when the need arises.

Mechanical	
Dimensions	145 x 92 x 72 mm
Weight	300 g with USB cable
Interfaces	
Connectivity	USB, cable or custom panel connector
Controls	
2-Axis Analog Sticks	1
1-Axis Analog Sticks	1
Pushbuttons	4
Dead-man switch	1
Environmental	
Operating Temperature	-20 °C to +50 °C
IP rating	IP65
Standards	
Environmental	MIL-STD-810G



The ergonomics of HC3